


4AM

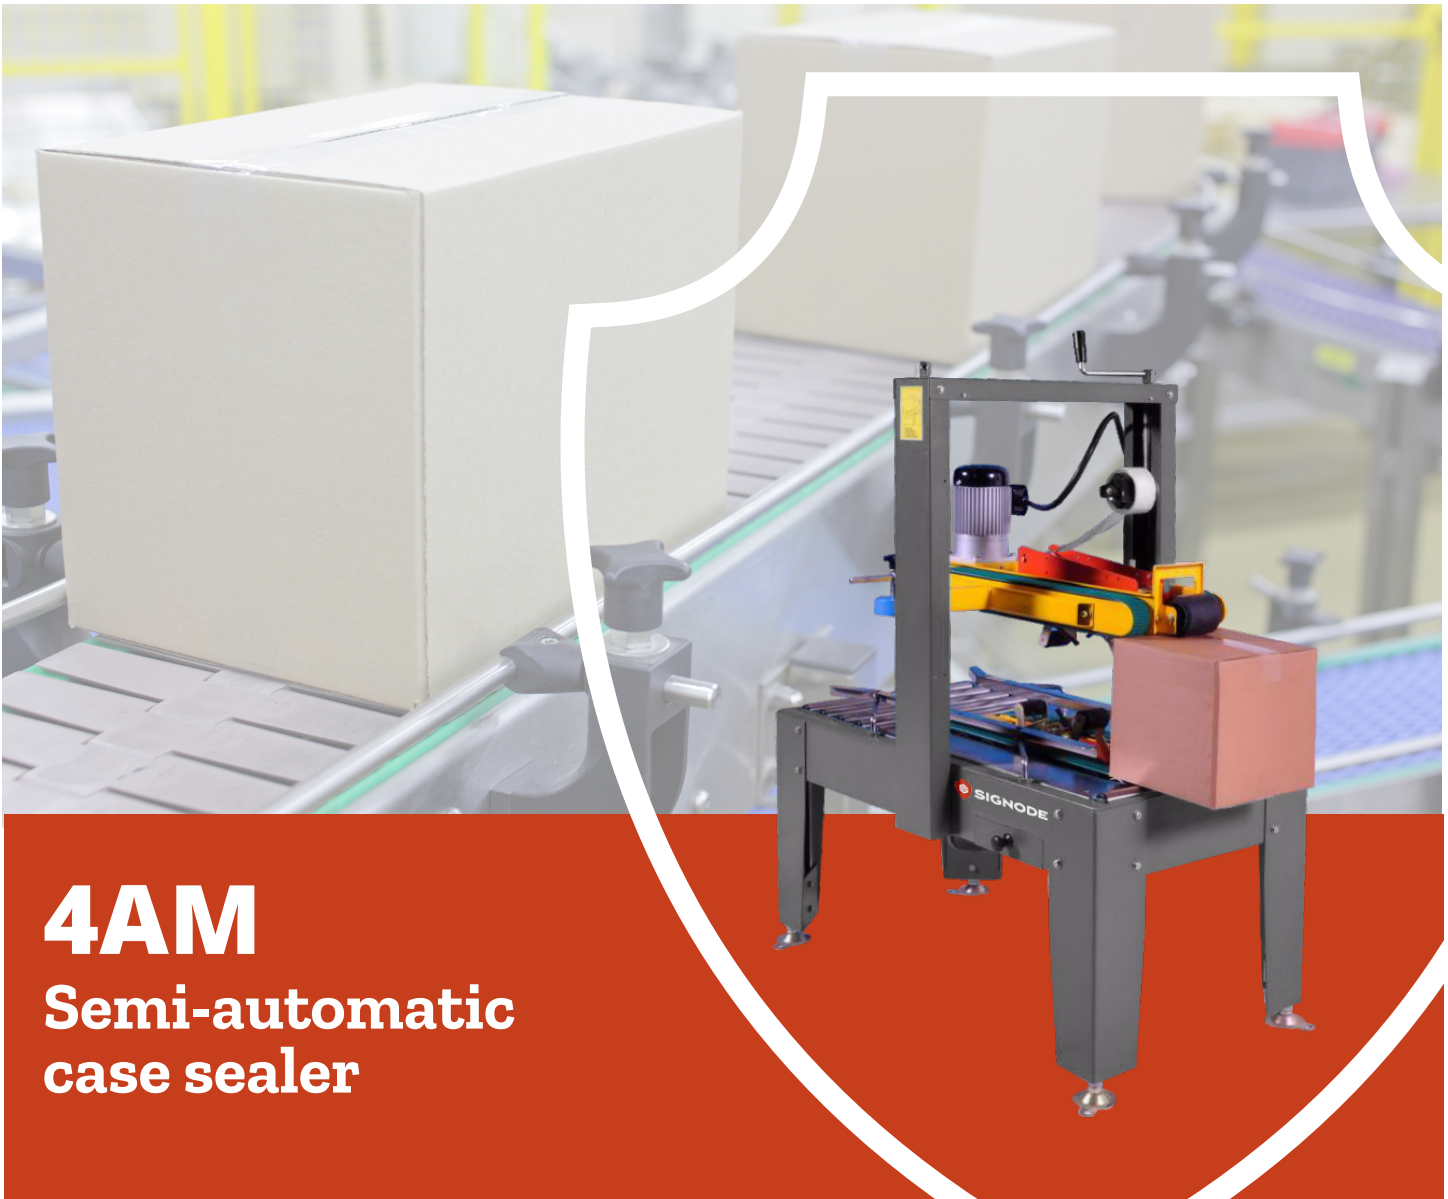

4AM Semi-automatic case sealer

Productivity Focus

Performance operating speed of 20 meters per minute

Easy Maintenance

Easy access to motors, electrical components and belts for maintenance

Production Versatility

Wide range of supported case sizes to meet customer requirements

Operator Friendly

Easy to operate with simple controls and intuitive tape roll replacement

4AM

Semi-automatic case sealer



Features and Benefits

- Ideal for batch production
- Twin mast column for greater stability during operation
- Separate top and bottom drive for consistent taping
- Uniform and controlled pressure during taping
- Twin flap end guide rollers secures flap centering
- Belt speed of 20m/minute
- Built in toolbox
- Self centering side guides for accurate centering
- Positive top and bottom drive to perform sealing of tall and heavy cartons, in addition to regular cartons



Utility Requirements

Power	230 VAC, 1 Phase, 50 Hz
Consumption	0.4 KW
Pneumatic	NA

Case Dimensions

Length	150mm to Unlimited
Width	160mm to 450mm
Height	100mm to 550mm
Weight	2 to 50 Kg
Carton Ply	Minimum 3 Ply

Technical Specifications

Tape Head	Standard (2", 2.5", 3")
Tape Roll Length	65 M / 650 M / 1000 M
Machine Length	1090mm
Machine Width	580mm
Conveyor Height	550mm
Machine Height	1360mm
Weight*	143 Kg
Drive Motor	0.25 HP, 2 No.
Belt Speed	20m / minute

* Machine weight 146 Kg for optional 4AM-ND model.