


5FRM

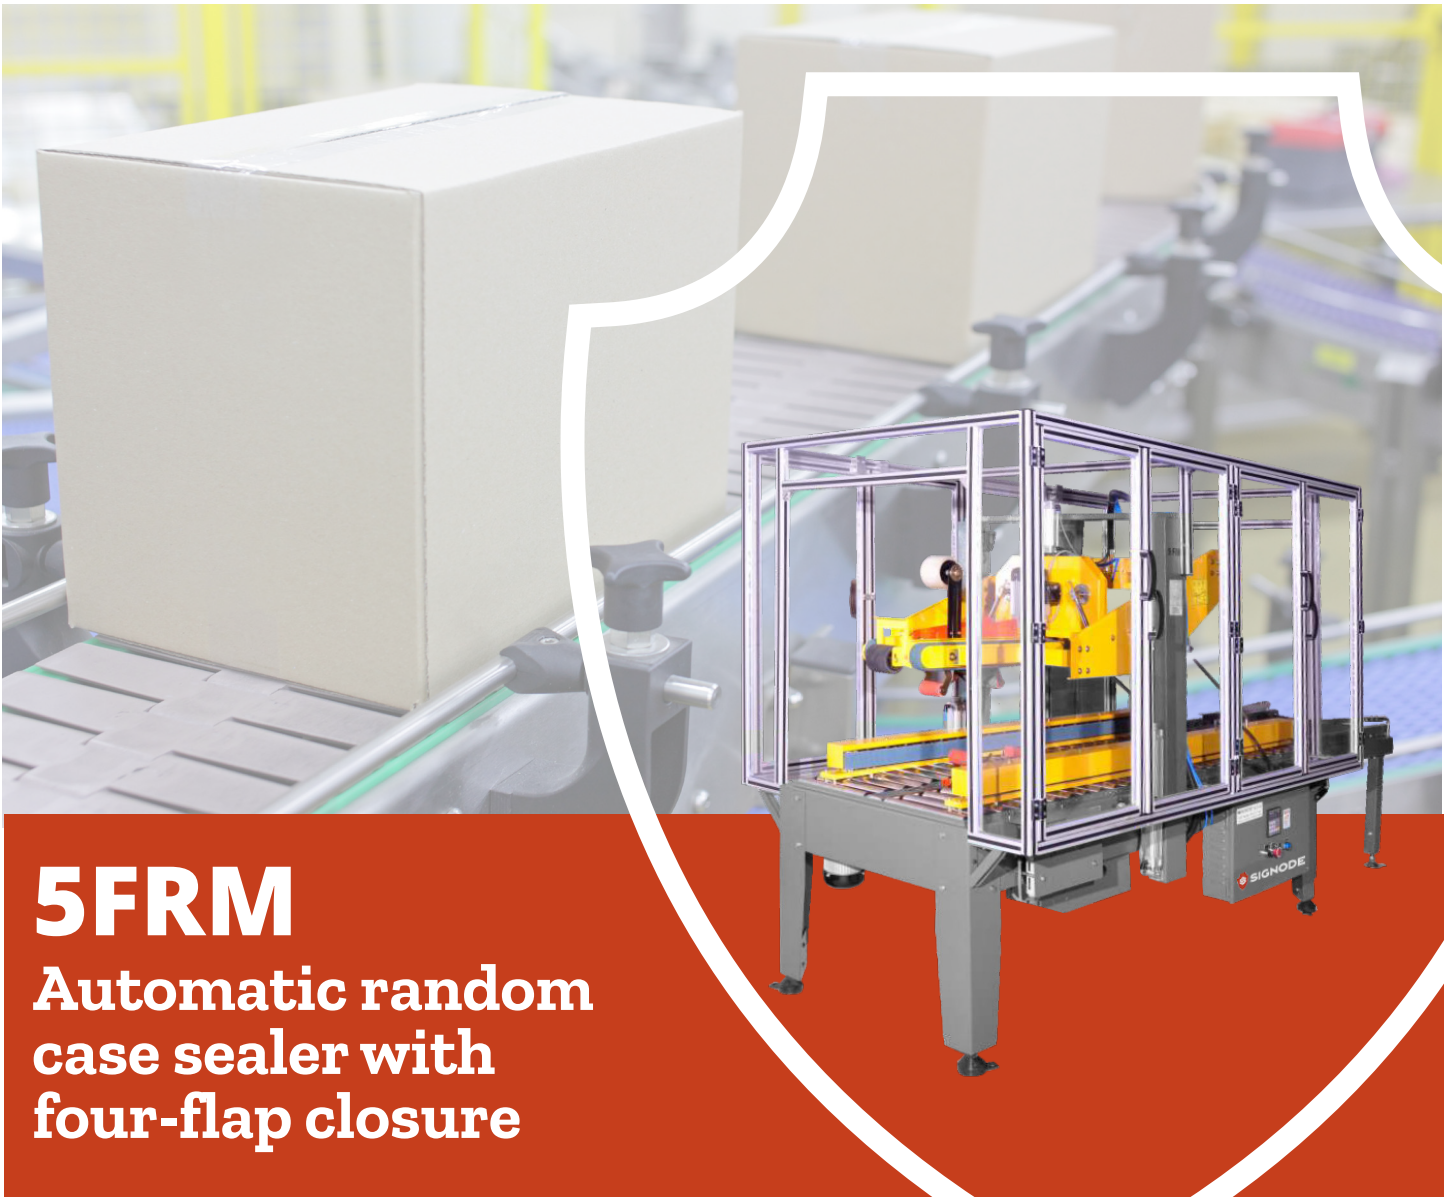

5FRM Automatic random case sealer with four-flap closure

Productivity Focus

Performance operating speed of 18 meters per minute

Easy Maintenance

Easy access to motors, electrical components and belts for maintenance

Production Versatility

Wide range of supported case sizes to meet customer requirements

Operator Friendly

Easy to operate with simple controls and intuitive tape roll replacement

5FRM

Automatic random case sealer



Features and Benefits

- Automatic sealing of random size cartons
- Machine automatically adjusts itself to varying size cartons
- Independently controlled top and side drives for smooth flow of cartons
- Easily integrates into production lines
- Automatic On/Off features enables power saving during idle time
- Twin mast column for greater stability during operation
- Pneumatic top drive and side guides align to the carton width and height automatically
- Uniform and controlled pressure during taping
- Belt speed of 18m/minute



Utility Requirements

Model	5FRM Standard	5FRM Small
Power	415 VAC, 3 Phase, 50 Hz	
Consumption	0.6 KW	0.4 KW
Pneumatic	6 Bar 15.8 Liters per cycle	6 Bar 8.6 Liters per cycle

Case Dimensions

Model	5FRM Standard	5FAM Small
Length	200mm to 570mm	200mm to 400mm
Width	170mm to 450mm	130mm to 320mm
Height	150mm to 400mm	130mm to 310mm
Weight	7 to 40 Kg	
Carton Ply	Minimum 5 Ply	

Technical Specifications

Model	5FRM Standard	5FRM Small
Tape Head	Flexible (2", 2.5", 3")	
Tape Roll Length	65 M / 650 M / 1000 M	
Machine Length	2040mm	1470mm
Machine Width	960mm	700mm
Machine Height	1450mm	1350mm
Weight*	295 Kg	255 Kg
Drive Motor	0.25 HP, 3 No.	
Throughput Speed	5-7 cartons / minute	8-9 cartons / minute

Available Options

- Polycarbonate machine guards for operator protection
- No/Low tape indicator reduces changeover downtime