


6AM

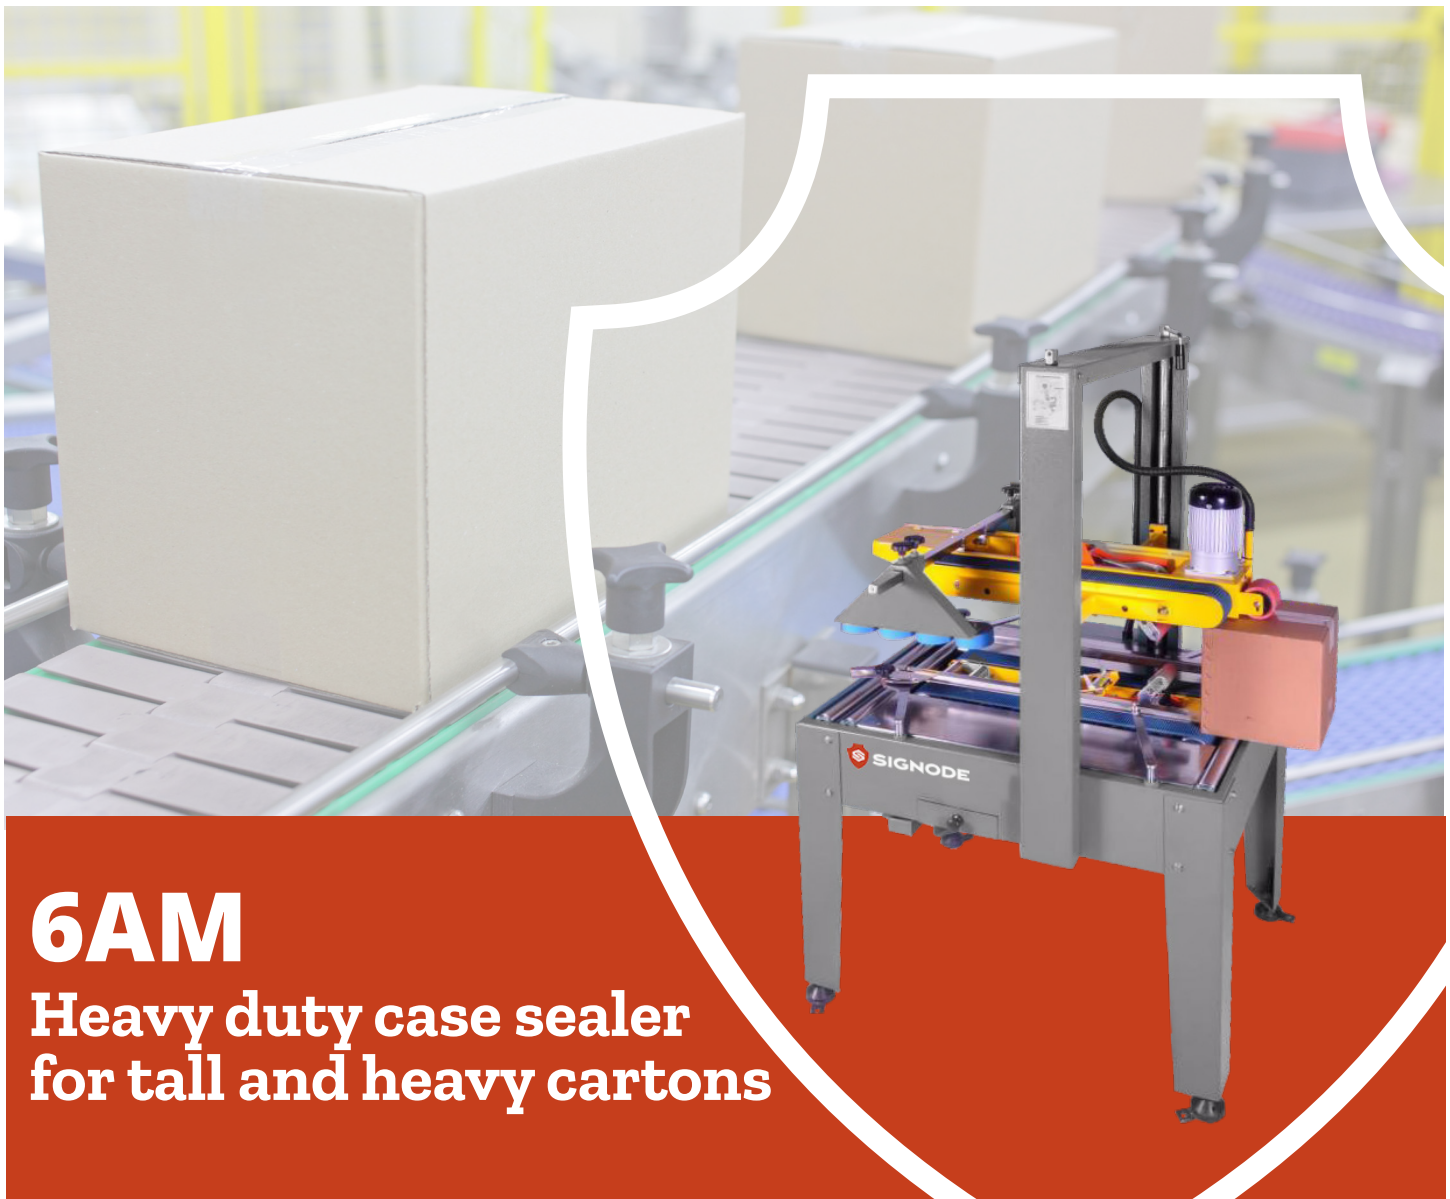

Productivity Focus

Performance operating speed of 18 meters per minute

Easy Maintenance

Easy access to motors, electrical components and belts for maintenance

Production Versatility

Wide range of supported case sizes to meet customer requirements

Operator Friendly

Easy to operate with simple controls and intuitive tape roll replacement

6AM

Heavy duty case sealer



Features and Benefits

- Ideal for batch production
- Twin mast column for greater stability during operation
- Separate top and bottom drive for consistent taping
- 3" drive belts for maximum load carrying capacity
- Uniform and controlled pressure during taping
- Twin flap squeeze rollers provide additional pressure for improved top flap alignment
- Belt speed of 18m/minute
- Built in toolbox
- Self centering side guides for accurate centering
- Positive top and bottom drive to accomodate sealing of tall and heavy cartons, in addition to regular cartons
- Telescopic legs for height adjustment



Utility Requirements

Power	415 VAC, 3 Phase, 50 Hz
Consumption	0.4 KW
Pneumatic	NA

Case Dimensions

Length	150mm to Unlimited
Width	225mm to 750mm
Height	120mm to 750mm
Weight	2 to 60 Kg
Carton Ply	Minimum 3 Ply

Technical Specifications

Tape Head	Flexible (2", 2.5", 3")
Tape Roll Length	65 M / 650 M / 1000 M
Machine Length	1030mm
Machine Width	826mm
Machine Height	1650mm
Weight*	198 Kg
Drive Motor	0.25 HP, 3 No.
Belt Speed	18m / minute

Available Options

- Polycarbonate machine guards for operator protection